



Electronic Pressure Switch AF27 – Type EPS:

- Two transistor switching outputs PNP
- 4-digit LED display, 4,5mm
- Adjustment range: 0,25...400bar
- Menu navigation according to VDMA
- Key programming
- Switching point or window function adjustable
- NO or NC function adjustable
- Switching delay function adjustable
- Multi-colour switch display
- Robust stainless-steel measurement cell
- Electrical connection M12x1

**Order code**

**EPS - A - BBB - C - D - E**

<b>A</b>	<b>Output</b>
	2 = 2 switching outputs PNP

<b>C</b>	<b>Measuring principle</b>
	A = thin film cell

<b>BBB</b>	<b>Pressure adjustment range</b>	
	020 = 0,25...20bar	pmax = 80bar
	100 = 1,0...100bar	pmax = 200bar
	250 = 2,5...250bar	pmax = 500bar
	400 = 4...400bar	pmax = 800bar

<b>D</b>	<b>Fluid connection</b>
	3 = G1/4" DIN3852

<b>E</b>	<b>Electrical connection</b>
	2 = plug M12x1

**Options**

<b>104206</b>	Adaptor G1/4" female fix - G1/4" male turnable
---------------	--

**Order sample: EPS-2-250-A-3-2**

Electronic Pressure Switch EPS  
Output: 2 switching outputs PNP  
Pressure adjustment range: 0...250bar  
Measuring principle: thin film cell  
Fluid connection: male G1/4" DIN3852  
E-connection: plug M12x1

---

## Technical data

---


Construction:	electronic pressure switch SW27			
Unit:	bar, psi, MPa			
Service life:	100Mio. switching cycles, 10Mio cycles (0...100%)			
Accuracy:	≤ 1% at room temperature incl. non-linearity, hysteresis, zero offset and end value deviation			
Output signal:	2 transistor switching outputs PNP, adjustable			
Reaction time:	< 10ms			
Power supply:	9,6...32VDC			
Current consumption:	max. 0,535A total			
Switching current:	max. 250mA per output			
Ranges in bar:	Lower limit:	Upper limit	Min. Hysteresis:	Increment:
0...20bar	0,25	20,00	0,25	0,05
0...100bar	1,0	100,0	1,0	0,2
0...250bar	2,5	250,0	2,5	0,5
0...400bar	4	400	4	1
Display:	4-digit, 7-segment LED			
Hight of display:	4,5mm			
Switch display	multi colour (red/green background)			
Temperature range:	-25...+85°C compensated			
Wtted parts:	stainless steel, FPM			
CE-Sign:	acc. to EU-standards 2004/108/EC			
Protection class:	IP67 acc. to DIN EN 40050			
Shock:	50g acc. to DIN EN 600068-2-6 (11 ms)			
Vibration:	10g acc. to DIN EN 60068-2-29 (500 Hz)			
Weight:	0,07kg			

*Please contact the technical support for alternatives or special requirement.  
Subject to technical alternations!*


---

## Electrical connection data - dimensions

---

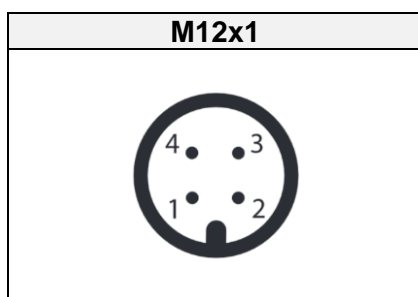

Pin 1	Positive power supply UB+
Pin 2	Switching output 2
Pin 3	Negative power supply 0V
Pin 4	Switching output 1

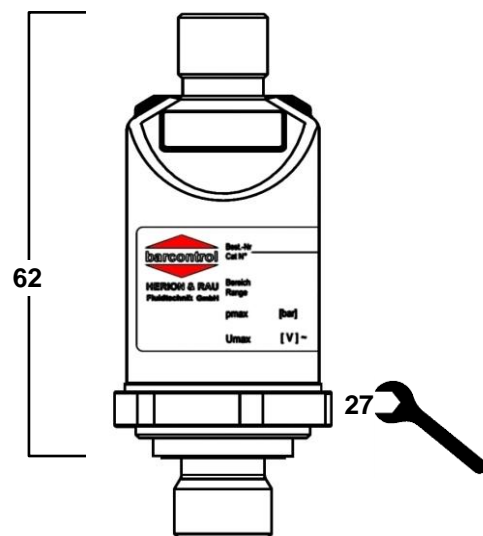

Torque value: 20Nm